



## The Sample Station Solution from the Makers of ControTrace®

### Benefits

- **Constant Volume Sampling:** Each sample is approximately 7 in<sup>3</sup> (115 mL).
- **No free path to atmosphere:** Sample style plug valve prevents process from having free path to atmosphere - promoting safety by preventing potential for operator exposure.

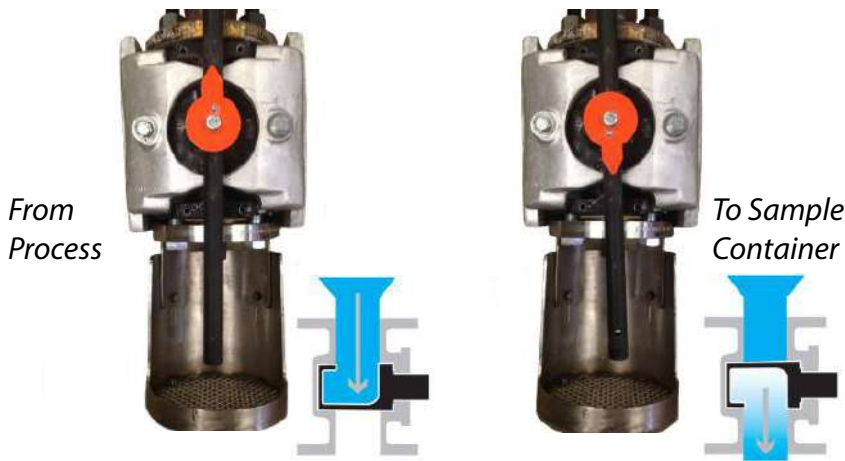

(Illustration Credit: Tufline Sleeved Plug Valves™, Xomox Process Valves & Actuators)

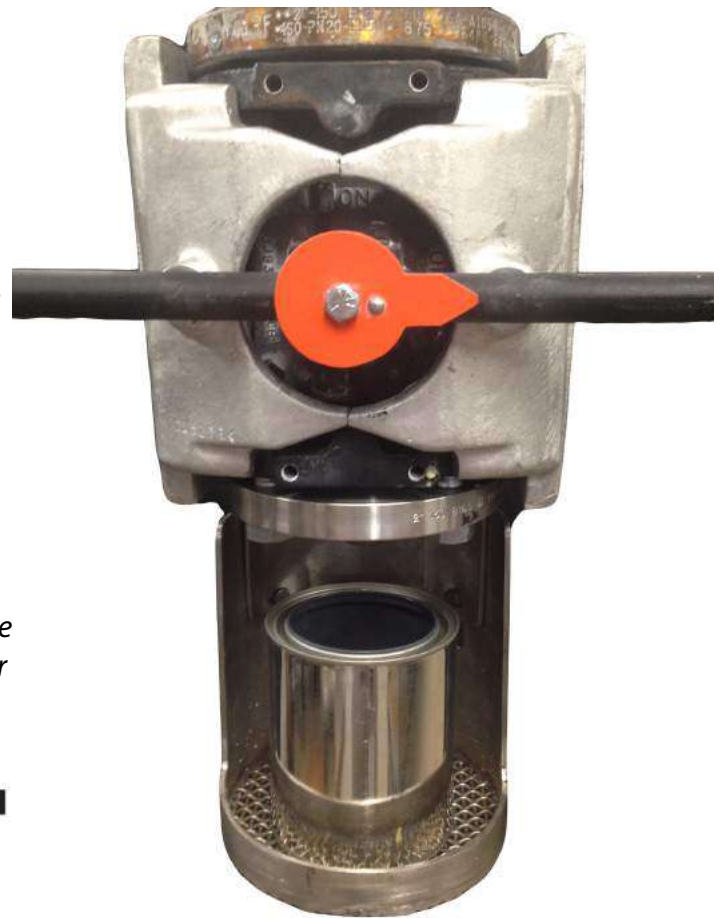

### Standard Features

- Carbon Steel valve body with stainless steel sample container holding basket.
- Fully jacketed with **CSI ControHeat** bolt on steam jacket.
- Only requires 2" NPS 150# flange connection process.
- Adjustable holding basket accepts containers up to 6" diameter x 6" tall.



The S<sub>x</sub> Sample™ is backed by CSI's engineering expertise, expansive production capacity, and exemplary customer service. CSI's S<sub>x</sub> Sample™ delivers the technical and commercial value you've come to expect from CSI for over 50 years.